


JT CAPAJOINT Lechada

WATER-PROOF SEALING GROUT

Water-proof sealing grout. With stable whiteness for filling in seals of 0 - 2 mm.

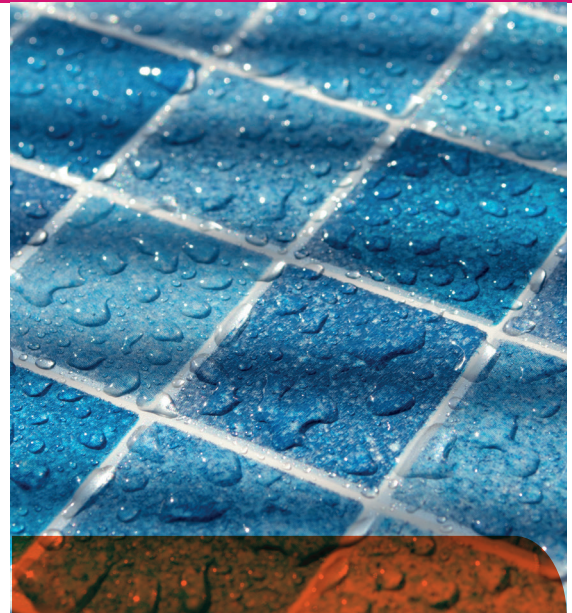

Excellent
whiteness



Fills seals
of 0-2 mm



Indoor use

DESCRIPTION

High-strength white cement-based product, micronized limestone sands and organic / inorganic additive, suitable for filling in seals of 0 to 2 mm between ceramic tiles. Indoor use

PRECAUTIONS AND RECOMMENDATIONS

Do not use the product in temperatures below 5°C or above 35°C.
Do not use when frost is forecast.
Avoid direct sunlight when using.
Follow the required quantity of mixing water.

HOW TO USE

1. Mechanically mix with clean water until obtaining a uniform mixture with the right consistency.
2. Leave to stand between 2 - 5 minutes before starting to use.
3. Check that the seals are clean and free of dust or adhesive. Dampen beforehand if weather conditions require you to do so.
4. Apply the paste onto the seals with a rubber trowel until filling the seal.
5. Take off any surplus product and clean with a damp sponge once it has dried.
6. For seals above 2 mm or outdoor seals, use Capa Color.



JT CapaJoint Lechada

Rev - 10/2025

PACKAGING

JT Capajoint Lechada is sold in 5 Kg bags (5 bags per box, in pellets of 800 Kg). Use it within 1 year of its packaging date and store in a dry and covered place in its original sealed packaging, away from damp.

TECHNICAL FEATURES

Appearance	Premixed white
Mixing water	1.85 litres/ Sack of 5 kg
Density as mixture	1,83 Kg/l
Service life of mixture	>60 min
Compressive strength at 28 days	>28 MPa
Flexural strength at 28 days	>5 MPa
Water absorption at 30 min	<3,5g

NOTE

Usage recommendations are based on our knowledge and experience. Technical data has been obtained under normal laboratory conditions, which may vary depending on the work conditions. As the usage conditions are not controllable on our part, the information on this sheet does not imply the company's responsibility.