


RV CAPAREV CAPAPROYECTABLE TX Autolimpiante

SPECIAL SELF-CLEANING MORTAR FOR MECHANICAL SPRAY APPLICATION

Waterproof rendering mortar with self-cleaning capacity. White, grey or pigmented. For outdoor use. GP CS III W2 and CR CS III W2 in accordance with Standard UNE EN 998-1.

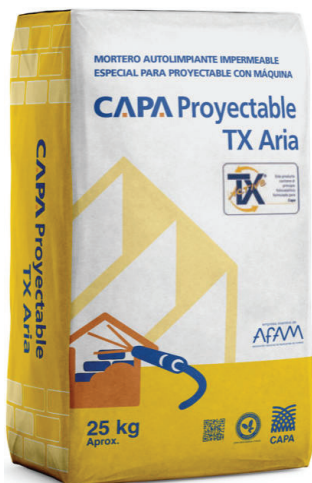

-  Environmentally friendly decontaminant
-  Fine finish
-  Waterproof
-  Projectable

DESCRIPTION

RV Caparev Capaprojectable TX Autolimpiante is made with photocatalytic white, grey cement, lime, selected aggregates of controlled grain size, inorganic pigments, and additives which improve the product's workability, adhesive bond, plasticity and waterproof. Specially formulated to be applied to a maximum thickness of 5 mm, as a fine-textured façade finishing.

APPLICATION SURFACES

Stable and healthy mortar renderings with a proper absorption, roughness, flatness and strength. Check that the application surface is suitably flat. Ensure that there is no dust, disintegrating parts, remains of plaster, paint and surface water repellents that avoid proper placing and anchoring.

HOW TO USE

1. Check that the application surface is suitable and ready for use.
2. Moisten surfaces before applying the product.
3. Use of 4.7-5 liters of clean water in an electric mixer at low rpm until you obtain a smooth, lump-free paste.
4. Leave the paste to stand for 2 minutes and mix again before applying.
5. Spread over the surface in thickness not exceeding 5 mm.
6. Once the mortar has started to harden, smoothed with a plastic or wood trowel.
7. Moisten the mortar 24 hours after application. Repeat for 2 to 3 days.



RV CAPAREV CAPAPROYECTABLE TX Autolimpiante

Rev - 09/2025

WARNINGS AND RECOMMENDATIONS

- Do not cover the surface of photocatalytic cement mortars, as it could affect its self-cleaning property.
- Do not apply directly to the enclosure (brick, concrete block, etc.).
- Do not apply onto plaster surfaces.
- Do not apply this product when frost or rain are forecasted.
- Do not apply at temperatures below 5 °C or above 35 °C.
- Do not apply onto smooth or non porous water repellent surfaces.
- It is advisable to moisten absorbent or very hot surfaces before applying the product and 24 hours afterwards in order to prevent the mortar from becoming overly dry or less strong.
- Use aplicaRev Fix as an adhesive bridge on concrete and on smooth or non porous surfaces.
- This product is ready to mix with water. Do not add any kind of additional substance which may alter its properties.
- Use within 1 year of date of packaging. Store the product in its original packaging in a dry, covered place protected from humidity.

PRESENTATION

RV Capaproyectable TX Autolimpiante is available in 25 kg paper sacks with moisture-proof plastic lining, dispatched on shrink-wrapped pallets weighing a total of 1,000 kg (40 sacks).

SELF-CLEANING

Photocatalytic cements work by dissolving or decomposing in the presence of light, the dirt that accumulates on the surface of walls and facades. Self-Cleaning mortar minimizes waste usually of biological origin, which stain the facades of buildings, public works, maintaining the color and aesthetic values of the initial construction, in addition to providing an extraordinary brilliance and luminosity

TECHNICAL FEATURES

Mixing water	4.75 - 5 V/sack
Compressive strength	CSIII
Capillary action	<0,2 Kg/m ² min. ^{0,5}
Grain size	<1,7 mm
Consumption	22±2 kg/m ² per 0,5 cm

NOTE

The recommendations for use are based on our own knowledge and experience. The technical data provided have been obtained under normal laboratory conditions, and may therefore vary according to the environmental conditions in the place where the product is use. As the applications are beyond our control, the information provided here does not imply that the company accepts responsibility for any variations.