




Flex Elastic C2 TE S2

Next-generation SUPER-FLEXIBLE gel adhesive formulated with Capagel NO DUST technology, which reduces dust generation during mixing. Especially suitable for all types of tile formats, substrates and environments. Low carbon footprint and excellent final performance.



20 KG

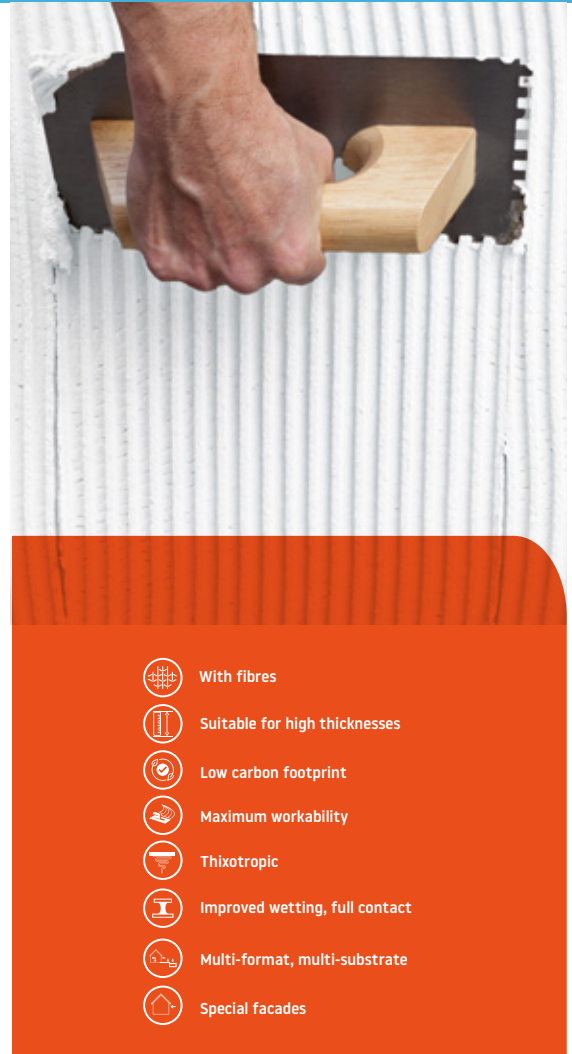

- With fibres
- Suitable for high thicknesses
- Low carbon footprint
- Maximum workability
- Thixotropic
- Improved wetting, full contact
- Multi-format, multi-substrate
- Special facades

DESCRIPTION

CO2LESS Capagel Flex Elastic is a high-performance, high-adhesion, next-generation super-flexible C2TE S2 gel adhesive whose reduced slip and extended open time provide excellent final performance. The GEL technology composition, based on geopolymers and new-technology fibres, gives it excellent mechanical properties as well as high thixotropy. It incorporates NO DUST technology, which controls dust emissions during product handling, reducing waste, health risks and helping to keep the application area clean. The best performance in our super-flexible adhesive range with maximum care for the environment, **thanks to its low carbon footprint.**

APPLICATIONS

Especially suitable for laying ceramic tiles, porcelain tiles, glazed stoneware, mesh-backed pieces, all types of natural stone and large-format porcelain slabs under the most demanding conditions. Especially recommended for use at low temperatures or when improved service readiness times are required, thanks to a shorter setting and hardening time. Suitable for application over any type of underfloor heating, as well as over existing tiles and floor coverings. For formats larger than 90x90 cm, the double-buttering technique is recommended, especially for outdoor applications.

SUPPORTS

Substrates must be fully set and clean of dust, paint and oil. Avoid dead plaster and weak renders. The product may be used on plasterboard, plaster and gypsum-based substrates, or on conventional substrates such as renders and concrete floors, as well as on aerated concrete. If used on substrates or with tiles not defined in the material's technical data sheet, consult the Technical Department.

HOW TO USE

- Mix mechanically with clean water (7 - 7.2L) until a homogeneous and workable consistency is obtained.
- Allow the mixed adhesive to stand for 5 minutes and remix before application.
- Spread the paste onto the substrate in areas no larger than 2 metres, combing it with the appropriate notched trowel. Follow the instructions for use set out in the UNE-EN 138002 table.
- Place the ceramic tiles onto the fresh gel adhesive, pressing them gently until full contact with the entire surface is achieved, flattening the ridges.
- For treating joints between tiles, both indoors and outdoors, as well as perimeter and structural joints, follow the instructions for use set out in the tables of the UNE-EN 138002 standard.





Flex Elastic C2 TE S2

Rev - 07/2026

PRECAUTIONS AND RECOMMENDATIONS

- Do not apply on weak or poorly cohesive substrates.
- Do not apply at temperatures below 5 °C or above 45 °C.
- Do not apply when there is a risk of frost or in rainy weather.
- In extreme weather conditions, such as wind and high temperatures, drying occurs faster than normal, reducing the open application time.
- In the event of high temperatures, wind and highly absorbent substrates, it is advisable to dampen the substrate and wait until the water film has disappeared before applying the material.
- Check the tackiness of the paste by periodically lifting a placed tile and ensuring that it is properly bonded.
- Apply the product following the instructions set out in the UNE-EN 138002 installation standard and in accordance with the instructions given in the technical data sheet. For any queries, consult the Technical Department.
- Use within 1 year from the packaging date and store in its original packaging in a covered, dry place, protected from moisture.

PRESENTATION

CO2LESS Capagel Flex Elastic represents a full commitment to the environment. Its packaging completely eliminates plastic thanks to its double layer of perforated paper, which ensures breathability and facilitates full recycling. It is also supplied in a convenient 20 kg package that makes handling easier and reduces the risk of injuries caused by lifting loads.

Packaging with certified recyclability. Recyclability test carried out by ITENE in accordance with UNE-EN 13430, obtaining the A Grade classification under Regulation (EU) 2025/40.

TECHNICAL CHARACTERISTICS

Mixing water:	7 - 7,2L
Particle size:	< 0,6 mm
Adjustment time:	2,5 h
Pot life:	50 min
Adhesion under normal conditions:	≥ 1 Mpa
Adhesion after water cycles:	≥ 1 Mpa
Adhesion after heat cycles:	≥ 1 Mpa
Adhesion after freeze-thaw cycles:	≥ 1 Mpa
Adhesion after 30 min open time:	≥ 0,5 Mpa
Slip:	< 0,5 mm
Transverse deformation:	≥ 5 mm
Foot traffic (20°C):	24h
Grouting (20°C):	24h
Application thickness:	3 – 20 mm
Coverage per mm of thickness:	1,13 Kg/mm ²

NOTE

The recommendations for use are based on our knowledge and experience. The technical data have been obtained under normal laboratory conditions and may vary depending on site application conditions. Since application conditions are beyond our control, the information in this data sheet does not imply any liability on the part of the company.